

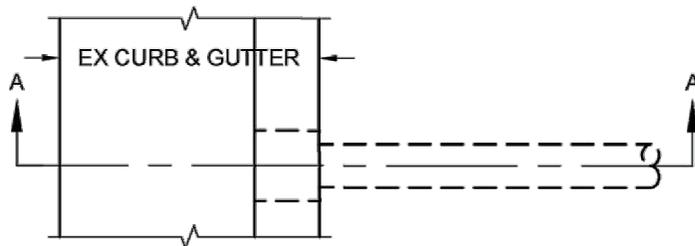


STORMWATER CURB OPENING

NEENAH R-3262-3

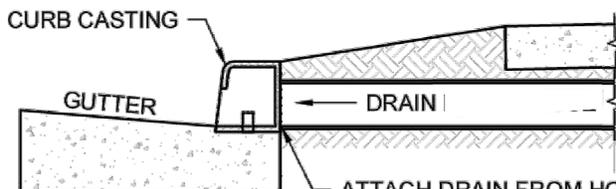


PLAN VIEW



ATTACH DRAIN FROM HOUSE WITH COUPLER AND WATER TIGHT BAND CLAMP PER MANF RECOMMENDATION. STUBBING IN PIPE AND GROUTING SHALL NOT PERMITTED

SECTION A-A

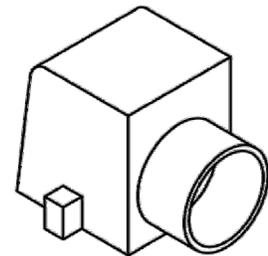

STORM WATER CURB OPENING

NTS

NOTES:

1. CONTRACTOR SHALL LOCATE AND RECONNECT ANY SIDE DRAINS FROM ADJACENT PROPERTY THROUGH THE CURB.
2. INSTALL R-3262-3 SERIES HEAVY DUTY STORM WATER CURB OPENING BY NEENAH OR APPROVED EQUAL;
3. FIELD VERIFY SIZE AND LOCATION PRIOR TO PAVING OPERATION.
4. CONTRACTOR SHALL CAST INLETS IN PLACE DURING CURB PRODUCTION. "CUT-IN" IS NOT ALLOWED.
5. TO BE USED FOR EXISTING PENETRATIONS. NEW CONNECTIONS ARE NOT ALLOWED UNLESS APPROVED BY OWNER.

REVISIONS

NAME	DATE	DESCRIPTION
OGREN	5/2/2024	REVISED CURB OPENING

STORM WATER CURB OPENING

**TOWN OF
TELLURIDE,
COLORADO**